

Visual Cooking 1.10

Combi ovens model C-gas / CPE-gas
 Capacity: 10 x 1/1 GN trays



General features

- Natural gas or LPG liquid gas
- Steam technology: injection steam
- Reversible fan ensures perfect roasting and baking
- Adjustable fan speed with 9 steps
- Optional door hinging, left (standard) or right
- Optional distance between runners, 65 mm or 85 mm
- Optional tray size, 1/1 GN (standard) or 400x600 mm
- 2-piece rack, lengthwise insertion
- Easy-to-clean design
- IP X5 protection
- Cabinet and oven chamber in BS 304 S 31 stainless steel
- Rounded corners in oven chamber
- Easily detachable door seal
- Halogen light in oven chamber
- Table model prepared for stand
- Timer function with current time, date and timer
- Manual humidity pulsing
- Preheating up to 300°C

General operating modes

- Hot air: 30-250°C
- Steaming with injection steam: 30-120°C
- Cook & Regen: 30-180°C

Scandinavian safety concept

- Oven door with ventilated heat-reflecting glass
- CTD Cool Touch Door (max. outside temperature of 65°C)
- 2-step door handle in stainless steel for optimum safety
- Integrated drip tray in stainless steel, self-emptying
- Automatic door stop at 110° and 180°
- Runners with stop
- Max. working height of 135 cm incl. stand

C-gas ovens standard features

Panel with turn switch and digital display
 Memory of 10 programmes - each with up to 3 steps
 Cook book with 5 preset programmes
 Combi 1 and Combi 2: 30-250°C
 Semi-automatic cleaning system
 Automatic cooling
 Error registration system



CPE-gas ovens standard features

Panel with soft keys and TFT display
 Memory of 200 programmes - each with up to 10 steps
 Cook book with 65 preset programmes
 ClimaOptima® automatic humidity control: 70-250°C
 Proving: 30-40°C
 CombiWash® fully automatic cleaning system
 Integrated hand shower
 Manual or automatic cooling
 Automatic service diagnosis system
 HACCP quality control
 USB connection




Optional features (visit www.houno.com)

CombiWash® fully automatic cleaning system (C-gas)
 Integrated hand shower (C-gas)
 Multi-point probe, external location
 Extra multi-point probe (CPE-gas)
 Remote control with CombiNet® (CPE-gas)
 Removable cassette rack
 Rack for plates, 27 or 32 plates
 Trolley for rack
 Insulating thermal blanket
 Stands e.g. with runners or shelf
 Exhaust funnel

Visual Cooking 1.10

Combi ovens model C-gas / CPE-gas
Capacity: 6 x 1/1 GN trays

Visual Cooking

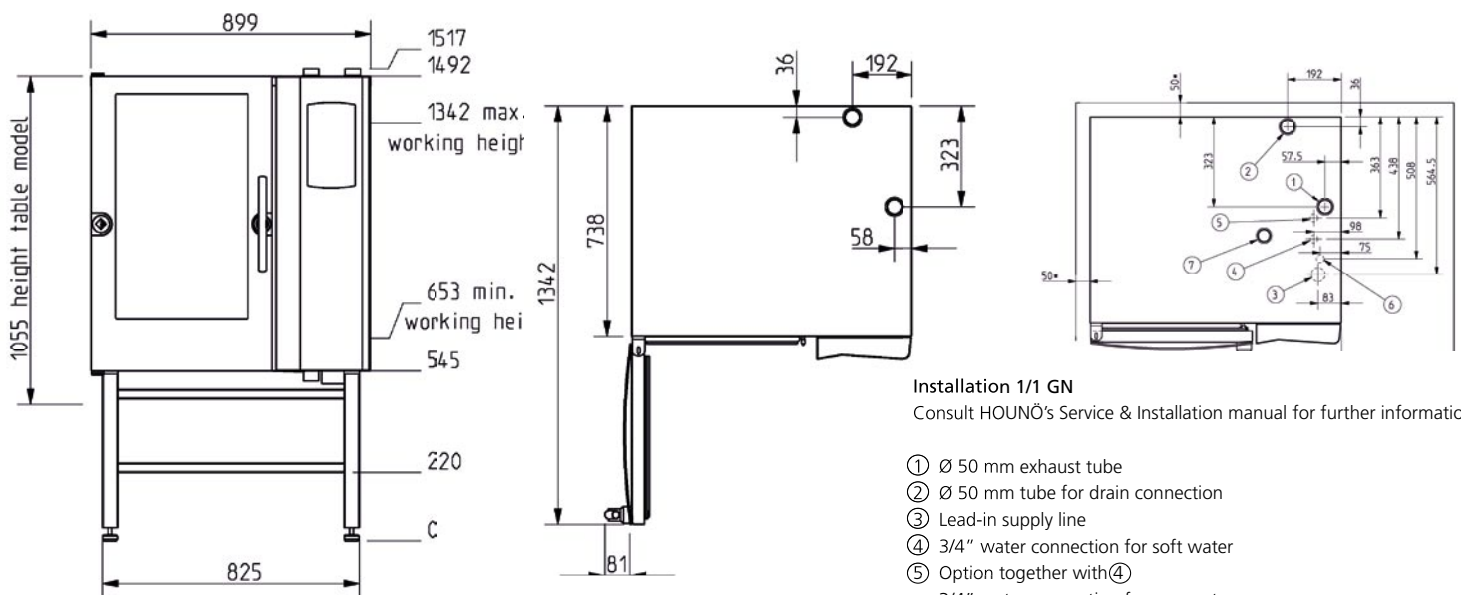

Installation 1/1 GN
Consult HOUNÖ's Service & Installation manual for further information.

- ① Ø 50 mm exhaust tube
- ② Ø 50 mm tube for drain connection
- ③ Lead-in supply line
- ④ 3/4" water connection for soft water
- ⑤ Option together with ④
- ⑥ 3/4" water connection for raw water
- ⑦ 3/4" gas connection
- ⑧ Ø 45 mm exhaust tube for heat exchanger

CAPACITY	
Tray size	1/1 GN eller 400 x 600
Number of runners, 65 mm	10
Number of runners, 85 mm	8
Portions	150
Potatoes	40/32 kg
Rice	10 kg
Vegetables	25 kg
Roasts	30-35 kg
Chickens, 900 g	24 stk.
Rolls	150 stk.
DIMENSIONS	
OVEN	
Width	900 mm
Height - table model	1055 mm
Height with stand	1495 mm
Depth (excl. handle)	831 mm
Weight	180 kg

DIMENSIONS		OVEN PACKED	
Width	1200 mm		
Height - table model	1255 mm		
Height with stand	1700 mm		
Depth (excl. handle)	1000 mm		
Weight	195 kg		
SPECIFICATIONS			
Voltage	1 NAC 230 V		
Gas type	Natural gas or LPG liquid gas		
Electrical connection	1.2 kW		
Gas consumption	21 kW		
Fuse protection	13 A		
Consumption at max yield	2,4 m ³ /h natural gas		
Consumption at max yield	1,6 kg/h LPG liquid gas		
Gas supply connection	3/4" RG outside		
Water connection	3/4" RG outside		
Drain	Ø 50 mm outside		