

Visual Cooking 15 & 15 roll-in

Bake-off ovens model B / BPE

Capacity: 15 x 400x600 mm trays



General features

- Steam technology: injection steam
- Reversible fan ensures perfect roasting and baking
- Adjustable fan speed with 9 steps
- Optional door hinging, left (standard) or right (15)
- Left-hinged door (15 roll-in)
- Optional distance between runners, 85 mm or 65 mm
- Optional tray size, 400x600 mm (standard) or 1/1 GN
- Cassette rack, lengthwise insertion (15)
- Roll-in trolley with cassette rack (15 roll-in)
- Easy-to-clean design
- IP X5 protection
- Cabinet and oven chamber in BS 304 S 31 stainless steel
- Rounded corners in oven chamber
- Easily detachable door seal
- Halogen light in oven chamber
- Standard stand
- Timer function with current time, date and timer
- Manual humidity pulsing
- Preheating up to 300°C

General operating modes

- Hot air: 30-250°C
- Proving: 30-40°C

Scandinavian safety concept

- Oven door with ventilated heat-reflecting glass
- CTD Cool Touch Door (max. outside temperature of 65°C)
- 2-step door handle in stainless steel for optimum safety
- Integrated drip tray in stainless steel, self-emptying
- Automatic door stop at 110° and 180°
- Runners with stop

B ovens standard features

Panel with turn switch and digital display
 Memory of 50 programmes - each with up to 10 steps
 CombiSmart® 10-step humidity control
 Semi-automatic cleaning system
 Automatic cooling
 Error registration system



BPE ovens standard features

Panel with soft keys and TFT display
 Memory of 200 programmes - each with up to 10 steps
 Cook book with 65 preset programmes
 ClimaOptima® automatic humidity control: 70-250°C
 CombiWash® fully automatic cleaning system
 Integrated hand shower
 Cook & Regen: 30-180°C
 Manual or automatic cooling
 Automatic service diagnosis system
 HACCP quality control
 USB connection





Optional features (visit www.houno.com)

CombiWash® fully automatic cleaning system (B)
 Integrated hand shower (B)
 Remote control and online access with CombiNet® (BPE)
 Extraction hood with or without steam condensator
 Trolley for rack (15)
 Extra roll-in trolley (15 roll-in)
 Storage trolley
 Cover for storage trolley
 Extra door, PassThrough version (15)
 Various voltages

Visual Cooking 15 & 15 roll-in

Bake-off ovens model B / BPE
Capacity: 15 stk. 400x600 mm trays

Visual Cooking

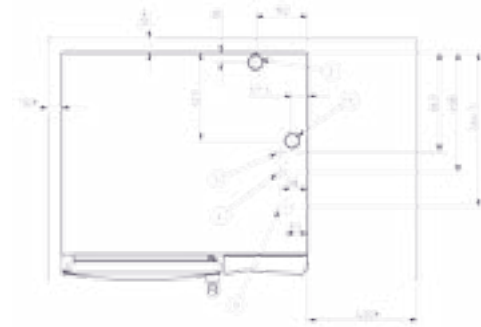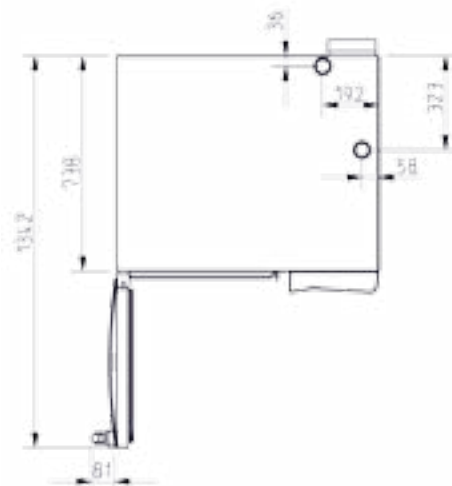

Installation 1/1 GN

- ① Ø 50 mm exhaust tube
- ② Ø 50 mm tube for drain connection
- ③ Lead-in for supply line
- ④ 3/4" water connection for soft water
- ⑤ Option together with ④
3/4" water connection for raw water

Consult HOUNÖ's Service & Installation manual for further information.

| CAPACITY | |
|--------------------------|-------------------------|
| Tray size | 400 x 600 or 1/1 GN |
| Number of runners, 85 mm | 15 |
| Rolls | 300 |
| Loaves, 600 g | 60 |
| Baguettes, 56 cm | 60 |
| Danish pastry | 180 |
| SPECIFICATIONS | |
| Voltage | 400V AC 3N + E 50/60 Hz |
| Wattage | 36 kW |
| Current | 52 A |
| Water connection | 3/4" outside |
| Drain | Ø 50 mm outside |

| DIMENSIONS | OVEN |
|----------------------|-------------|
| Width | 900 mm |
| Height - table model | |
| Height with stand | 1855 mm |
| Depth (excl. handle) | 886 mm |
| Weight | 255 kg |
| DIMENSIONS | OVEN PACKED |
| Width | 1200 mm |
| Height - table model | |
| Height with stand | 1700 mm |
| Depth (excl. handle) | 1000 mm |
| Weight | 270 kg |